


Performance data

Efficiency of concrete cutting Performance (Cut concrete to depth of 40 mm.)

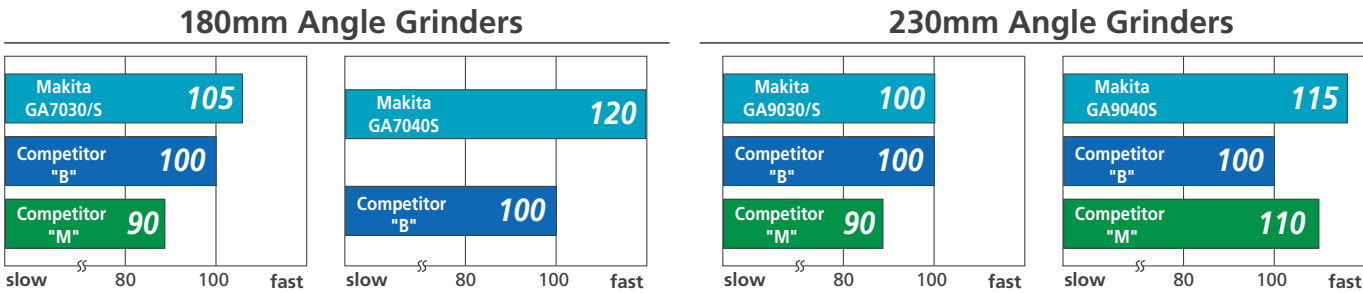

Option

Anti Vibration AVT Grip Part No. 194290-6

Plastic carrying case

Part No. 824755-1

Dust Collecting Wheel Guard Part No. 194044-1

Dust Covers Part No. 194289-1
Protect motor from metal dust.

Loop Handle

Part No. 192619-0

Angle Grinder GA7030/ GA7030S/ GA7040S 180mm (7") / GA9030/ GA9030S/ GA9040S 230mm (9") 204

Double Insulation

Soft Start (GA7030S/ GA7040S/ GA9030S/ GA9040S)

Torque Limiter

(GA7030)

(GA9040S)

Specification	GA7030/ GA7030S	GA7040S	GA9030/ GA9030S	GA9040S
Continuous rating Input	2,400W		2,600W	
Capacity (Depressed center wheel)	180mm (7")		230mm (9")	
Hole dia.	22.23mm (7/8")		22.23mm (7/8")	
No load speed	8,500rpm		6,600rpm	
Dimensions (L x W x H)	511mm x 200mm x 140mm (20-1/8" x 7-7/8" x 5-1/2")		511mm x 249mm x 140mm (20-1/8" x 9-3/4" x 5-1/2")	
Net weight	5.1kg (11.2lbs)	5.5kg (12.1lbs)	5.1kg (11.2lbs)	5.5kg (12.1lbs)
Power supply cord	2.5m (8.2ft)		2.5m (8.2ft)	
Standard equipment	Lock Nut wrench, Grip (Tool does not come with depressed center wheel)			

Items of standard equipment and specifications may differ from country to country.



Angle Grinders
GA7030/ S, GA7040S 180mm (7")
GA9030/ S, GA9040S 230mm (9")

Satisfy Professional's Needs



ROBUST CREATURE
G E N E R A T I O N



Makita Corporation
3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan




PRINTED IN JAPAN Z23245-2 2006-05

The Inside of the Creature Is...

Outstanding Durability

/// Superior Anti-Dust Structure

Protective zigzag varnish on armature coil.
Protective powder varnish-coating on field coil.
Bearing-protective labyrinth construction.
Vent slots designed to minimize dust entrance.

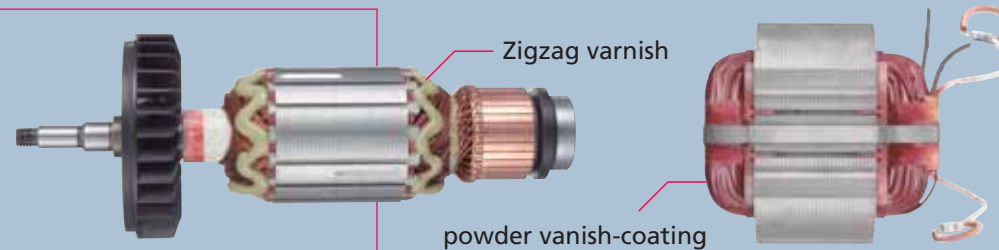

/// Machined Bevel Gear

having durability higher than sintered gear.



/// Large Rubber Tool Rest

/// Increased Heat Resistance

superior to our predecessor models.

/// Torque Limiter

/// Large-boned shaft



/// Heavy Duty Motor

180mm (7") GA7030/ S **2,400W** GA7040S **2,600W**

230mm (9") GA9030/ S **2,400W** GA9040S **2,600W**

/// Rotatable Rear Handle

Can be positioned to suit most cutting and grinding operations. (90 degrees R/L)



/// Low Vibration Rear Handle

with Soft Grip for More Comfort and Control.



/// Vibration Absorbing Side Grip (option)

